

**date** 08/05/2022

page 1 of 4

# MODEL: CBL-UA-BC-1 | DESCRIPTION: USB CABLE

#### **FEATURES**

- USB 2.0
- type A male to blunt cut
- 1 meter
- PVC jacket





#### **SPECIFICATIONS**


<u> </u>						
parameter	conditions/description	min	typ	max	units	
rated voltage			20		Vdc	
rated current				1	А	
conductor resistance				5	Ω	
insulation resistance	at 300 Vdc	10			МΩ	
operating temperature		-20		80	°C	
storage temperature		-20		80	°C	
flammability rating	UL94V-O					
RoHS	yes					

### **MECHANICAL DRAWING**

units: mm tolerance: X.X ±0.5 mm X.XX ±0.3 mm X.XXX ±0.1 mm unless otherwise noted

critical dimension: \*

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
1	cable	UL 2725 OD: 4.7±0.2 mm PVC	black
2	connector 1	USB 2.0 Type A	insulator: white shell: nickel term.: gold flash
3	over mold	PVC 45P	black

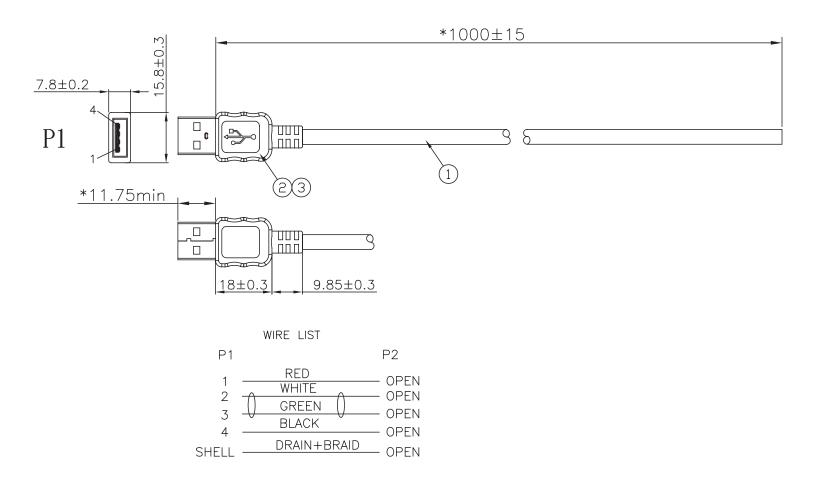


## **PACKAGING**

units: mm

Carton Size: 546 x 355 x 186 mm

Carton QTY: 100 pcs

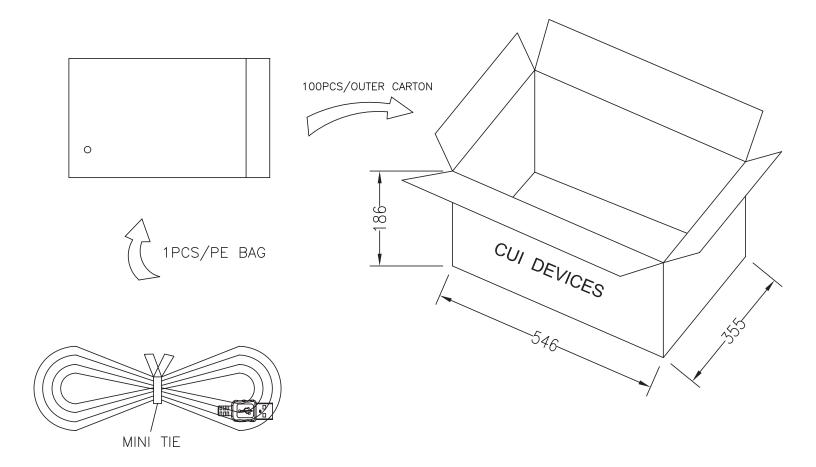

#### **REVISION HISTORY**

rev.	description	date
1.0	initial release	12/21/2018
1.01	brand update	02/17/2020
1.02	update drawing	08/25/2020
1.03	modified design, changed factory	01/27/2022
1.04	logo, datasheet style update	08/05/2022

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.